



# Bulatex® S166



## Closed cells EPDM-based

Good compression set  
Conformable on irregular surfaces

- Anthracite black

Classification	ASTM D1056	2 A1 A2 B2 C1 F1 M P
	BMW S 603 00.0	A 941 EPDM 3 1 0.05
	GMW 17408	Class II Type IV
	PSA B65 4360	EPDM 08 X C2 04/08 4100X0
	RENAULT 03-10-102	2 C 04/08 B4 C2 P1 except tearing resistance
	VW TL 52065	Depends on drawing requirements

Properties	Test Conditions -Standard	Values / Units	
Density	ISO 845	80 ± 15 kg/m <sup>3</sup>	5 ± 1 lb/ft <sup>3</sup>
Hardness (1)	ASTM D 2240	20 Shore 00	
Compression deflection 25%	ASTM D1056	15 - 35 kPa (average 25)	2.1 – 5.1 psi (average 3.6)
Compression deflection 50%	NFR 99 211	55 - 105 kPa (average 80)	8.0 – 15.2 psi (average 11.6)
Compression set 23°C	ASTM D1056 50%, 22 h, 23°C	≤ 35 %	
Compression set 40°C	NFR 99-211 50%, 22h, 40°C	≤ 60 %	
Linear shrinkage	HUT CID INS LAB 10 003 After 7 days at 70°C	≤ 5 %	
Tearing resistance	NFR 99-211	≥ 0,3 daN/cm	≥ 1.7 lbf/in
Vacuum water absorption	NFR 99-211	≤ 5%	
Total carbon emission (1)	VDA 277 / PV 3341	4 µg C/g	
Volume resistivity (1)	IEC 60 093 120x120x2 mm -500V	10 <sup>15</sup> Ω.cm	
Fire resistance	US FMVSS 302 - UL94 to be confirmed acc. to final configuration	Pass < 100 mm/min HBF ≥ 3 mm	Pass < 3.94 in/min HBF ≥ 0.12 in
Gross block dimensions	Thickness 2 skins within the specified surface	min 2000 x 1000 x 65 mm	min 78.74x 39.37x2.56 in

Temperature range (1)		
Continuous	-40°C / +120°C	-40 °F/+248°F
Peak	+140°C	+284°F
Glass transition (DSC)	-56°C	-68°F
Heat capacity (DSC)	1.6 to 2.4 J.g <sup>-1</sup> .°C <sup>-1</sup>	
	0.38 to 0.57 Btu.lb <sup>-1</sup> .°F <sup>-1</sup>	

Chemical resistance (1)	
Oil	Low
Ozone	Excellent
Air + UV	Excellent


(1) Indicative information value only

**Bulatex® S166**



**Thermal conductivity (1)**

Acc. to ISO 8301 for density = 80 kg/m<sup>3</sup> 5lb/ft<sup>3</sup>

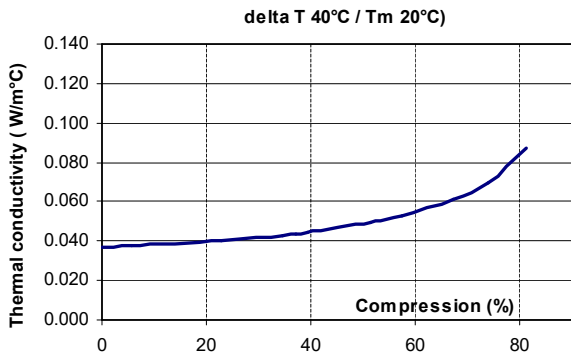


1 W.m<sup>-1</sup>.°K<sup>-1</sup> = 0.5777 BTU<sub>IT</sub>.Hr<sup>-1</sup>.ft<sup>-1</sup>.°F<sup>-1</sup>

T Celsius = (T Fahrenheit - 32) × 5 / 9

**Compression deflection: load & unload (1)**

For density = 80 kg/m<sup>3</sup> 5lb/ft<sup>3</sup>

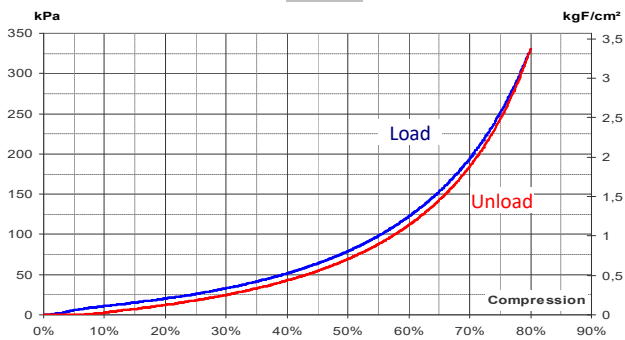

1kPa = 0.145 psi

1kgF/cm<sup>2</sup> = 14.223 psi



(1) Indicative information value only

**Bulatex® S166**





**Acoustic (1)**

Absorption: Kundt's pipe acc. to EN ISO 10534-2

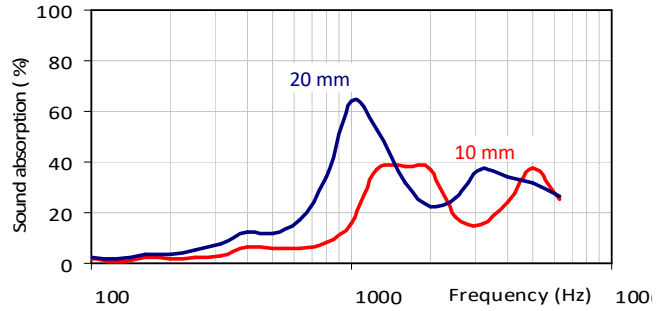

Insertion loss acc. to B39 6130

Measure of the acoustic insulation gain provided by the filling of a 7.5 mm slit by a seal thickness 30 mm

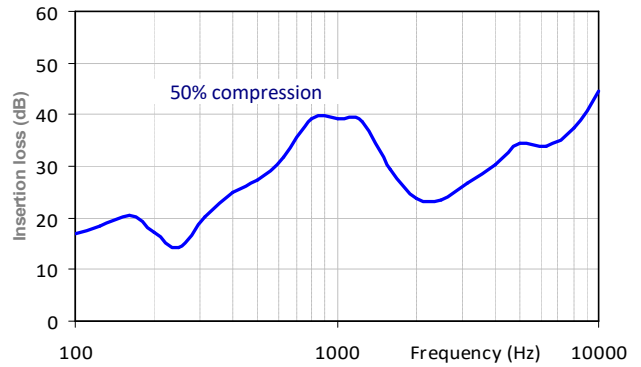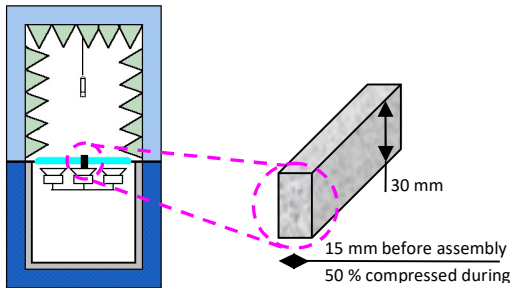

**FOAM AND CONVERTING DIVISION**  
 BP56 F-45120 CHÂLETTE / LOING  
 Phone: +33.2.38.87.54.48  
 Contact : [dcicommun@hutchinson.fr](mailto:dcicommun@hutchinson.fr)

The information given in this document results from performed laboratory tests. However, this cannot be considered as a commitment from the supplier/manufacturer. Modifications could be made without prior notice at any moment without notice. It is recommended to the user to verify the data before use. Our technical department is at your disposal for any recommendation. Users are recommended, in case of need, to check with supplier/manufacturer. Our technical department will be at your disposal.

(1) Indicative information value only